

# Vertical and 19" Basic PDUs

## Intro

Basic PDU's are units that provide power distribution in all systems where electricity connection is required such as data centers, server rooms, network cabinets. Estap basic pdu feeds your devices completely with their special designs.



## GENERAL CHARACTERISTICS









- On-demand production
- Compliant with relevant standards
- On/off switch and circuit breaker options
- Suitable for mounting 19" and vertical mounting in the cabinet
- Easy to install with mounting accessories
- Schuko, C13-C19 and UK socket types are available
- Energy-efficiency
- Cost-effective
- Horizontal and vertical design
- Aluminium profile frame

## REFERENCE TABLE

PRODUCT REFERENCE	PRODUCT DESCRIPTION
M443AL	3xDIN49440 Socket Schuko PDU, 19" 1U, aluminium profile frame, 1x16A MCB, 4000 Watt, 250V AC, 3x1.5mm <sup>2</sup> , 3m cord with DIN 49441 plug, CE
M446AL	6xDIN49440 Socket Schuko PDU, 19" 1U, aluminium profile frame, 1x16A MCB, 4000 Watt, 250V AC, 3x1.5mm <sup>2</sup> , 3m cord with DIN 49441 plug, CE
M446AL_UK	6xDIN49440 UK Socket Schuko PDU, 19" 1U, aluminium profile frame, 1x16A MCB, 4000 Watt, 250V AC, 3x1.5mm <sup>2</sup> , 3m cord with 13A BS1363 plug, CE
M446ALD	6xDIN49440 Socket Schuko PDU, -double circuit (3+3) 19" with aluminium profile frame, 2x16A MCB, 4000 Watt, 250V AC, 3x1.5mm <sup>2</sup> , 2, 5m cord with DIN 4944, CE
M446ALIEC	6xIEC 320 C13 Socket PDU, 19" aluminium profile frame, 1x16A MCB, 4000 Watt, 250V AC, IEC 320 C14 plug, CE
M446ALDIEC	6xIEC 320 C13 Socket PDU, double circuit (3+3), 19" 1U aluminium profile frame, 1x16A MCB, 4000 Watt, 250V AC, IEC 320 C14 plug, CE
M449ALC	9xDIN49440 Socket Schuko PDU, 19" 2U, aluminium profile frame, 1x16A MCB, 4000 Watt, 250V AC, 3x1.5mm <sup>2</sup> , 3m cord - DIN49441 plug, CE
M449ALCD	9xDIN49440 Socket Schuko PDU, double circuit (4+5) 19" aluminium profile frame, 2x16A MCB, 4000 Watt, 250V AC, 3x1.5mm <sup>2</sup> , 2, 5m cord with DIN 49441 plug, CE
M449ALCIEC	9xIEC 320 C13 Socket PDU, 19" aluminium profile frame, 1x16A MCB, 4000 Watt, 250V AC, IEC 320 C14 plug, CE
M449ALCDIEC	9xIEC 320 C13 Socket PDU, double circuit (4+5) 19" aluminium profile frame, 1x16A MCB, 4000 Watt, 250V AC, IEC 320 C14 plug, CE
M4411ALUK309	11xBS1363 UK Socket PDU, 19" 1U, aluminium profile frame, 20A MCB, 5000 Watt, 250V AC, 3x2.5mm <sup>2</sup> , 3m cord - 32A IEC309 plug, CE
M4412ALC	12xDIN49440 Socket Schuko PDU, 19" 2U, aluminium profile frame, 1x16A MCB, 4000 Watt, 250V AC, 3x1.5mm <sup>2</sup> , 3m cord - DIN49441 plug, CE
M4412AL_UK	12xDIN49440 UK Socket Schuko PDU, 19" 2U, aluminium profile frame, 1x16A MCB, 4000 Watt, 250V AC, 3x1.5mm <sup>2</sup> , 3m cord - DIN49441 13A BS1363 plug, CE
M441226ALD	12xDIN49440 Socket Schuko PDU, double circuit (6+6), 2x16A MCB, 250V AC, compatible with 26U rack mounting, without cord, CE
M441836ALD	18xDIN49440 Socket Schuko PDU, double circuit (9+9) ZeroU, aluminium profile frame, 2x16A MCB, 250V AC, compatible with 36U rack mounting, without cord, CE
M441842ALD	18xDIN49440 Socket Schuko PDU, double circuit (9+9) ZeroU, aluminium profile frame, 2x16A MCB, 250V AC, compatible with 42U rack mounting, without cord, CE
M441847ALD	18xDIN49440 Socket Schuko PDU, double circuit (9+9) ZeroU, aluminium profile frame, 2x16A MCB, 250V AC, compatible with 47U rack mounting, without cord, CE
M441836ALDIEC	18xIEC 320 C13 Socket PDU, double circuit (9+9) ZeroU, aluminium profile frame, 2x16A MCB, 250V AC, compatible with 36U rack mounting, without cord, CE
M441842ALDIEC	18xIEC 320 C13 Socket PDU, double circuit (9+9) ZeroU, aluminium profile frame, 2x16A MCB, 250V AC, compatible with 42U rack mounting, without cord, CE
M441847ALDIEC	18xIEC 320 C13 Socket PDU, double circuit (9+9) ZeroU, aluminium profile frame, 2x16A MCB, 250V AC, compatible with 47U rack mounting, without cord, CE
M442442ALD	24xDIN49440 Socket Schuko PDU, double circuit (12+12), 2x16A MCB, 250V AC, compatible with 42U rack mounting, without cord, CE
M442442ALDIEC	24xIEC 320 C13 Socket PDU, double circuit (12+12), 2x16A MCB, 250V AC, compatible with 42U rack mounting, without cord, CE
M4424ALIECAMPMB	24xIEC 320 (20xC13 + 4xC19) Socket PDU with Ampermeter, ZeroU, alu profile frame, 2x16A MCB, 8000W, 250V AC, 3x6.0mm <sup>2</sup> , 3m cord with IEC60309 plug (32A 2P+E), CE
M443042ALTIECMCB_SP	30xIEC 320 (24xC13 + 6xC19) Socket PDU with Ampermeter, ZeroU, alu profile frame, 3 Phase, 3x32A MCB, 24000W, 250V AC, 5x6.0mm <sup>2</sup> , 3m cord with IEC60309 plug (32A 2P+E), CE


# 19" Basic PDU

## 19" TECHNICAL DRAWINGS

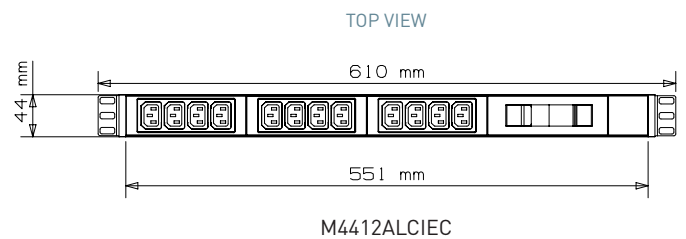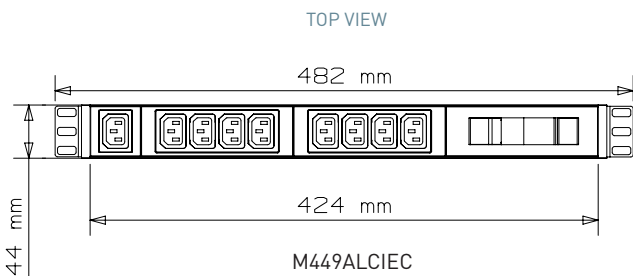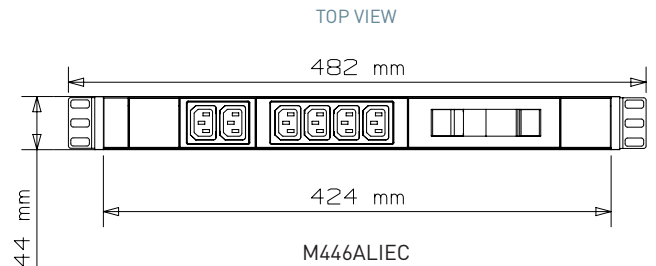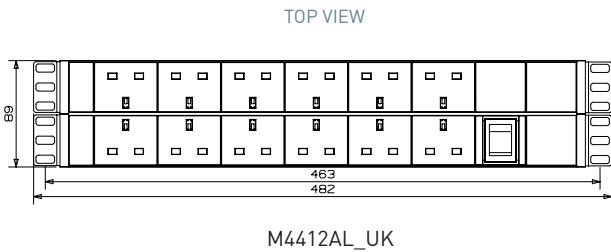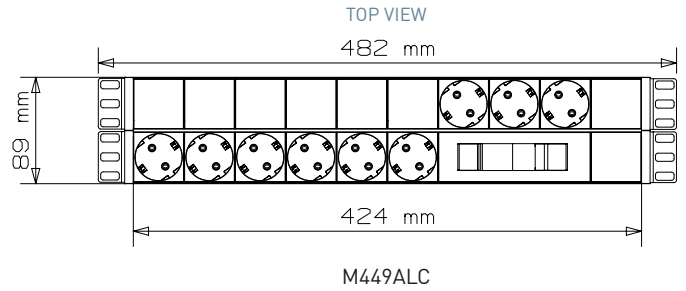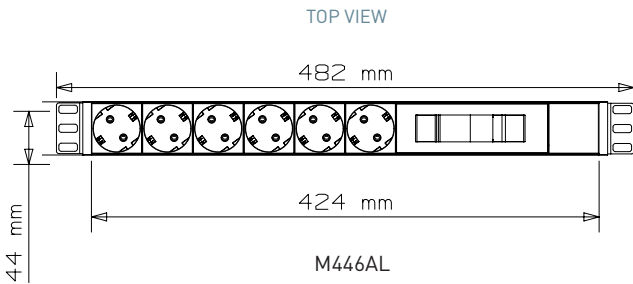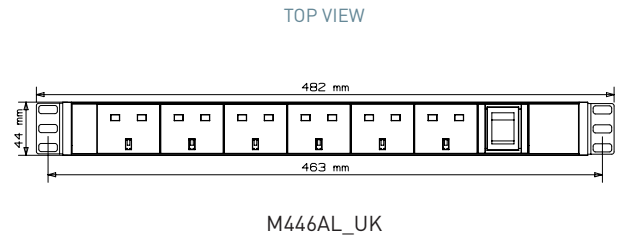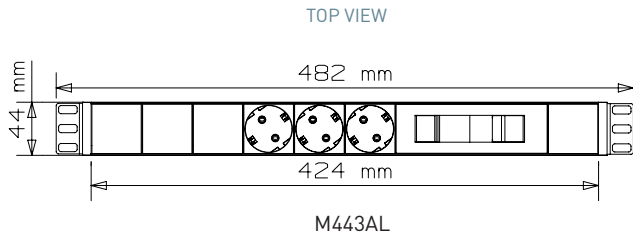


# Vertical Basic PDU


## VERTICAL PDU TECHNICAL DRAWINGS

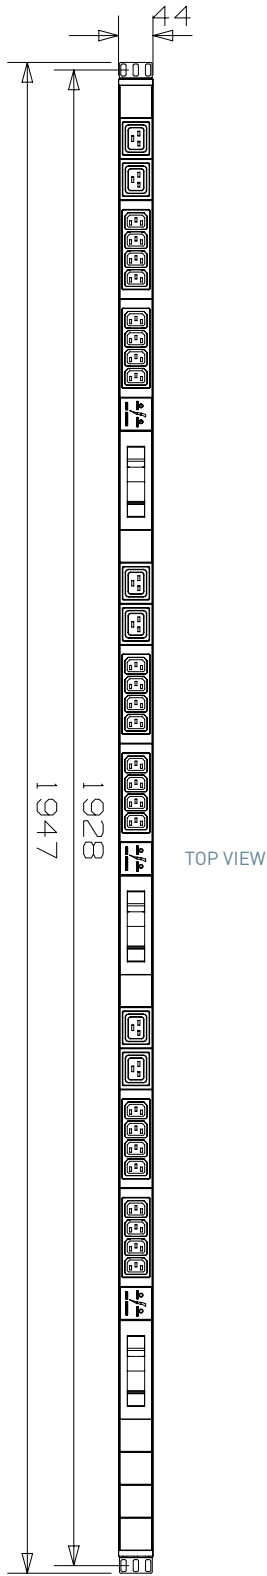


M443042ALTIECMCB\_SP\_ES

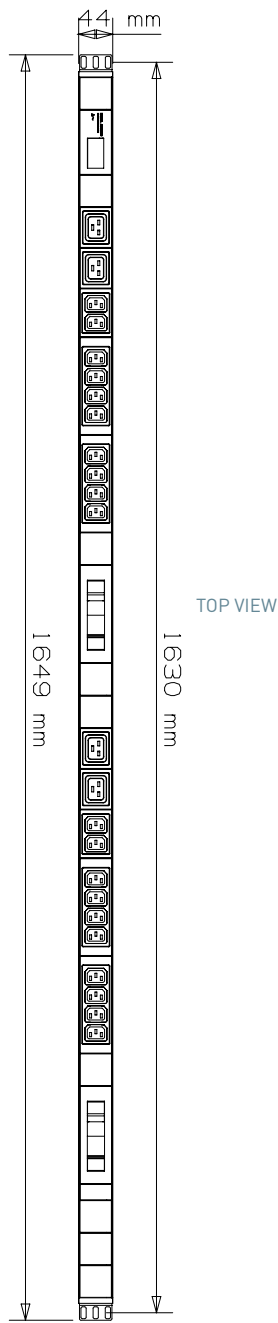

M44244ALIECAMPCB

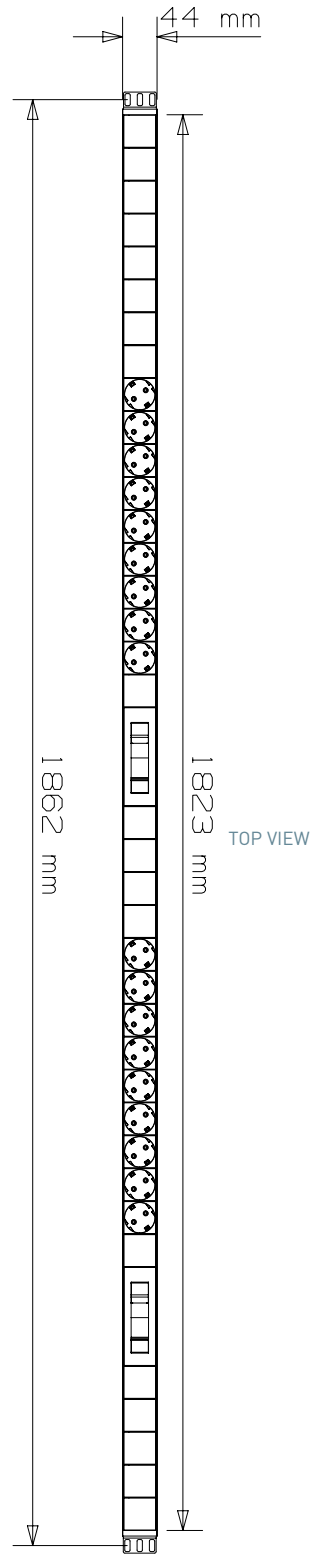

M441842ALD

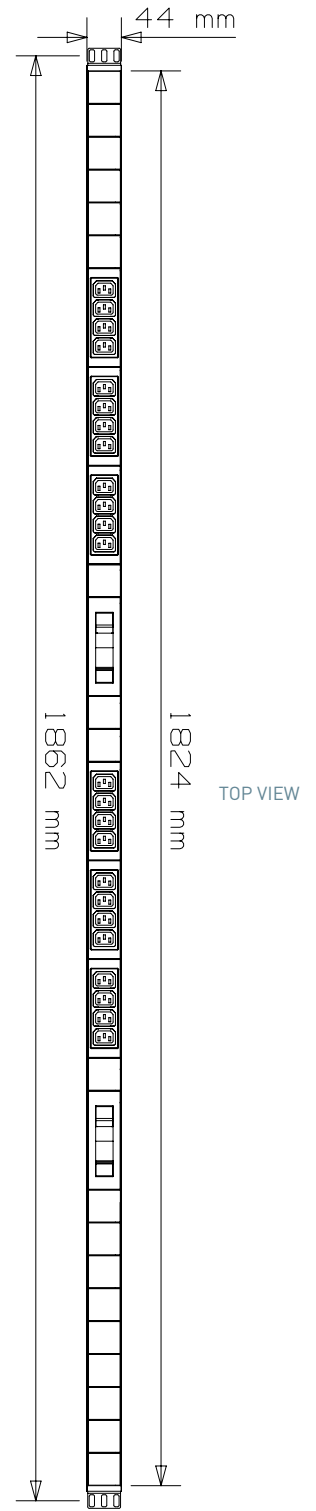

M442442ALDIEC

# 19" Basic PDU

## 19" TECHNICAL DRAWINGS

